




SiSiB® EF2059 FLUID

- 1 -

CHEMICAL NAME

Polydiethylsiloxane

CHEMICAL STRUCTURE

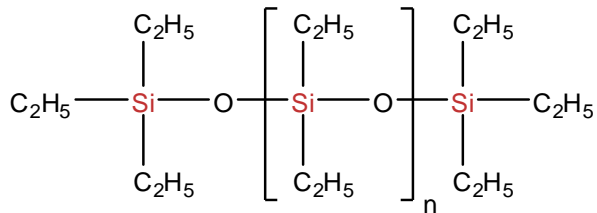

INTRODUCTION

SiSiB® EF2059 is a high viscosity Polydiethylsiloxanes.

TYPICAL PHYSICAL PROPERTIES

CAS No.	63148-61-8
Color and Appearance	Colorless to straw liquid
Flash Point	>250°C
Viscosity _{25°C}	10000~100000cSt.

APPLICATIONS

Polydiethylsiloxanes offer improved metal-metal lubrication and low temperature properties when compared to polydimethylsiloxanes.

High-viscosity polydiethylsiloxane can be used as damping fluid for instrument and sensor;

It is also can be used as thickening fluid for mineral oil and synthetic grease.

PACKING AND STORAGE

Power Chemical
ISO9001 ISO14001 certificated

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB® is a registered trademark of PCC. For more knowledge regarding our silicone products, you may visit www.SiSiB.com or www.PCC.asia.



SiSiB® EF2059 FLUID

- 2 -

SiSiB® EF2059 is supplied in 25Kg plastic drum.

In the original unopened packaging, SiSiB® EF2059 has a shelf life of one year in a dry and cool place.

NOTES

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: support@SiSiB.com.

Power Chemical
ISO9001 ISO14001 certificated

Copyright© 2008 Power Chemical Corporation Ltd.
SiSiB® is a registered trademark of PCC. For more knowledge regarding our silicone products, you may visit www.SiSiB.com or www.PCC.asia.