




# SiSiB<sup>®</sup> PC2310 SILANE

- 1 -

## CHEMICAL NAME

gamma-Mercaptopropyltriethoxysilane

## CHEMICAL STRUCTURE

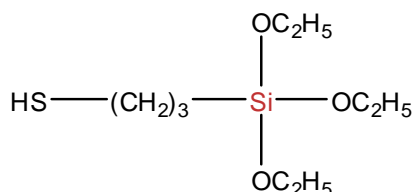

## INTRODUCTION

SiSiB<sup>®</sup> PC2310 is a bifunctional organosilane possessing a reactive organic mercapto and a hydrolyzable inorganic methoxysilyl group. SiSiB<sup>®</sup> PC2310 is a clear, colorless to light yellow liquid with a slightly mercaptan odor. It is soluble in alcohols, ketones and aliphatic or aromatic hydrocarbons.

## TYPICAL PHYSICAL PROPERTIES

CAS No.	14814-09-6
EINECS No.	238-883-1
Formula	C <sub>9</sub> H <sub>22</sub> O <sub>3</sub> SSi
Molecular Weight	238.42
Boiling Point	210°C [760mmHg]
Flash Point	88°C
Color and Appearance	Colorless to light yellow clear liquid
Density <sub>25/25°C</sub>	0.993
Refractive Index	1.4331 [25°C]
Purity:	Min.98.0%

## APPLICATIONS

SiSiB<sup>®</sup> PC2310 can be used as coupling agent to improve the adhesion of sulfur cured

**Power Chemical**  
ISO9001 ISO14001 certified

Copyright© 2009 Power Chemical Corporation Ltd.  
SiSiB<sup>®</sup> is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit [www.SiSiB.com](http://www.SiSiB.com) or [www.PCC.asia](http://www.PCC.asia)



# SiSiB® PC2310 SILANE

- 2 -

elastomers (polysulfide, polyurethane sealants) to inorganic fillers (such as silica, clay, glass, mica and talc etc.), fiberglass and surfaces. Mineral-reinforced articles such as shoe soles, rubber rollers and wheels, white sidewalls, and wire and cable insulation also can be produced with lower silane loadings.

SiSiB® PC2310 can be used to improve properties of mineral filled elastomer, including modulus, tensile and tear strength, heat buildup, abrasion resistance, resilience, compression set and cure time.

SiSiB® PC2310 can be used as a pretreatment on minerals or added at the time of compounding.

SiSiB® PC23010 can be used to improve low-rolling resistance in silica-reinforced tire tread compounds.

## PACKING AND STORAGE

SiSiB® PC2310 is supplied in 200Kg steel drum or 1000Kg IBC container.

In the unopened original container SiSiB® PC2300 has a shelf life of one year in a dry and cool place.

## NOTES

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: [silanes@SiSiB.com](mailto:silanes@SiSiB.com).

**Power Chemical**  
ISO9001 ISO14001 certified

Copyright© 2009 Power Chemical Corporation Ltd.  
SiSiB® is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit [www.SiSiB.com](http://www.SiSiB.com) or [www.PCC.asia](http://www.PCC.asia)